



### Specifications:

Axial Sensitivity (20±5°C)	~4 pC/N
Measurement Range	0~5000 N (Compression Only)
Overload Capacity	120%
Non linearity	≤ 1% F.S.
Lag	≤ 1% F.S.
Non Repeatability	≤ 1% F.S.
Mounting Resonance Frequency	> 70 kHz
Operation Temp. Range	-40~+150 °C
Insulation Resistance	≥ 10 <sup>13</sup> Ω
Capacitance	7 pF
Mounting Method	Adhesive or fixture
Sensing Element	Quartz
Case Material	Stainless Steel
Weight	11 g
Output Type	L5 (side)
Grounding	Signal Ground Connected to Case
Low Noise Cable to BNC	Included
Calibration Certificate and Frequency Response Curve	Included

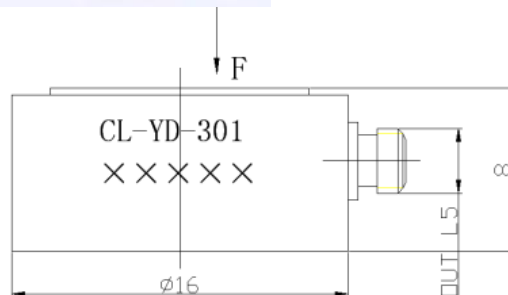

Schematic diagram

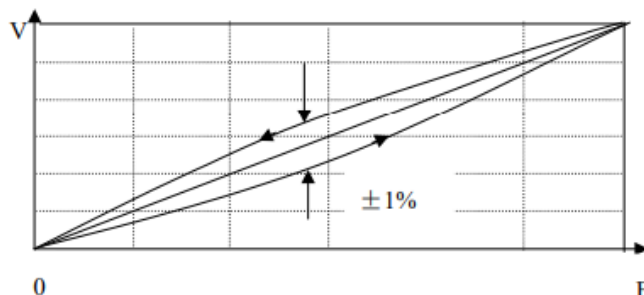

Typical static error curve (3 time average)